



VISTA FRONTALE
TAMBURO VENTILATORE

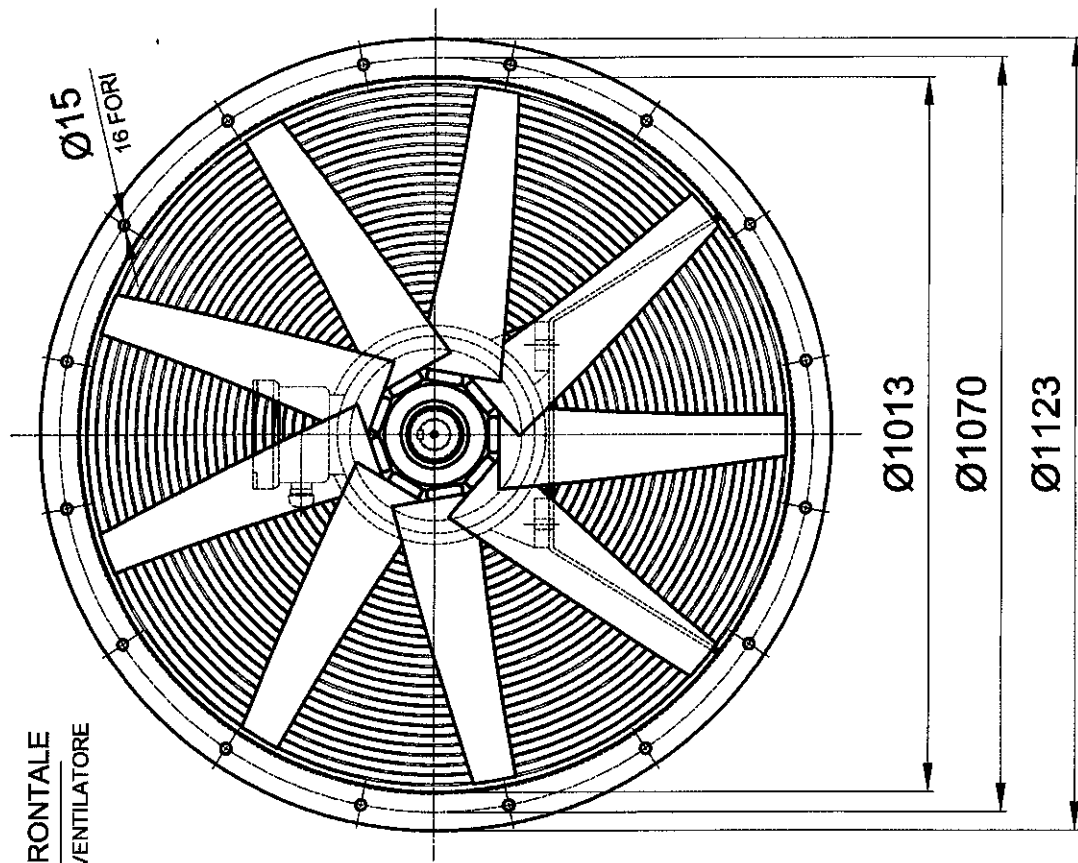

MOTORE
15 kW - 4 POLI
400/690 Volt - 50 Hz

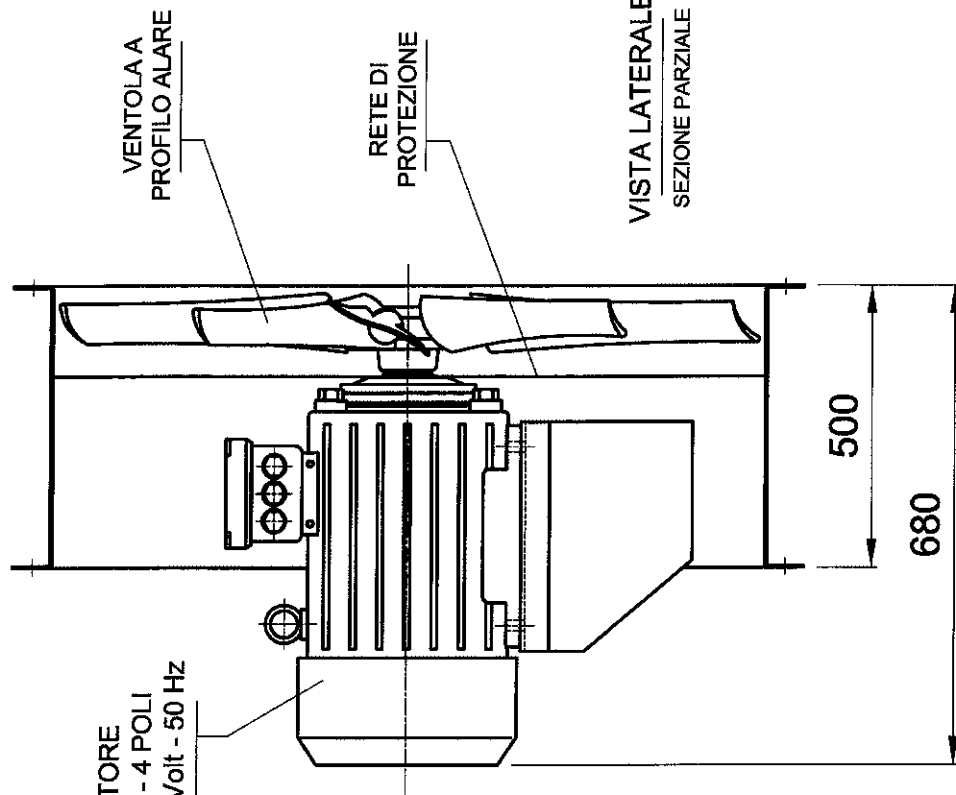

VISTA LATERALE
SEZIONE PARZIALE

FORATURA FLANGIA
SECONDO NORMA
UNI ISO 6580
EUROVENT 1-2


ARTICOLO	VENTILATORE INTUBATO			CLIENTE
MODELLO	D/ER 1000/E - 15 kW - 4 POLI			STANDARD
CODICE	DER-1000/E	MATERIALE	Fe	DISEGNATO DA
SCALA				BODON M.
				DATA
				18/03/2009
IL PRESENTE DISEGNO E' DI PROPRIETA' DELLA SAMA S.r.l. A TERMINI DI LEGGE E' VIETATA LA RIPRODUZIONE				

1000/9-9/45°/PPG/5ZL/Tp 1 %

DATE: 07/06/2014

COMPANY: -
ATTN: -

FROM: Multi-Wing International a.s
sama srl

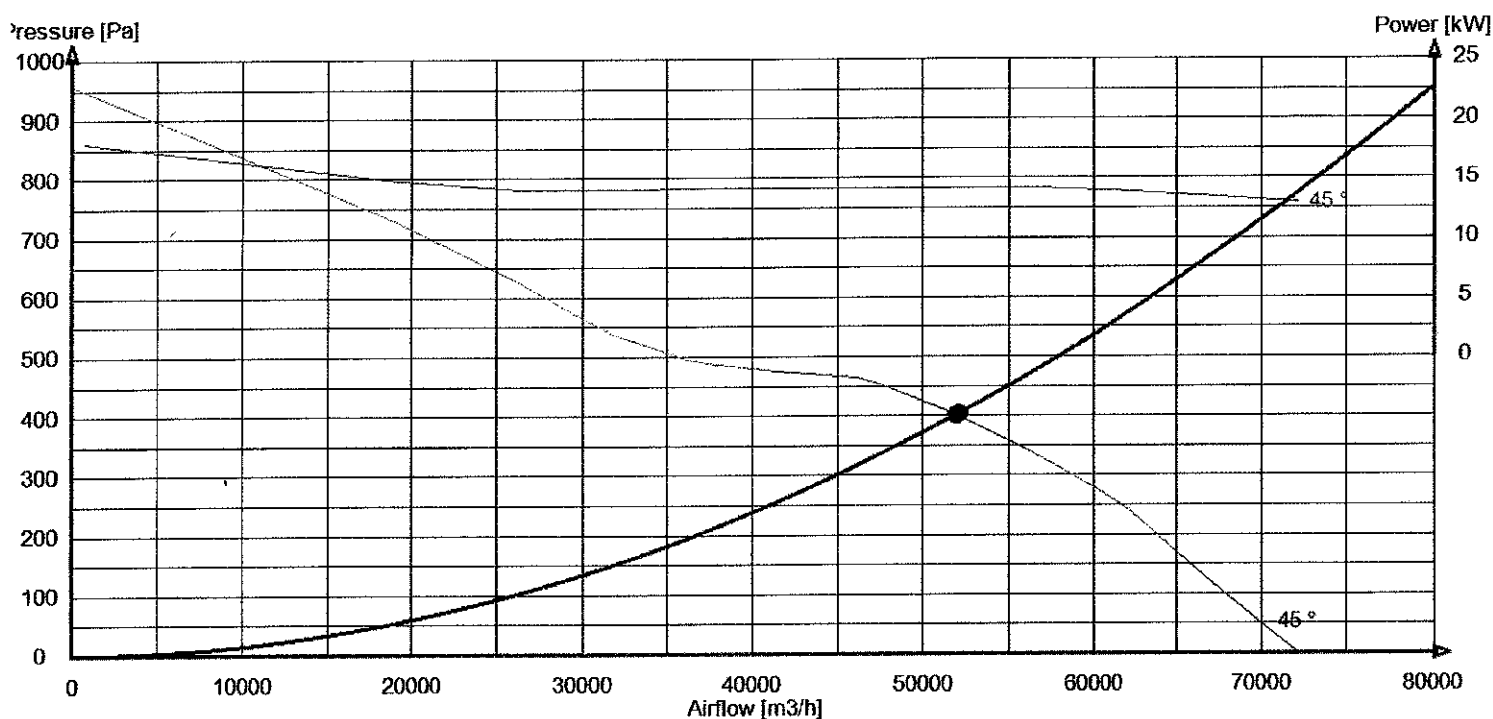

IMPELLER INFORMATION:

Impeller Diameter: 1000 mm
No of blades: 9
Pitch: 45 °
Blade Material: PPG
Blade Type: 5Z
Impeller Rotation: L

Tests are carried out according to methods described in ANSI / AMCA 210-99 (ISO 5801, DIN 24163)

Sound data is calculated and should be used as guideline only

APPLICATION:

Speed: 1460 RPM
Tip Clearance: 1 %
Temperature: 20 °C
Altitude: 0 m
Density: 1,204 kg/m³

Disclaimer

Load factors in Optimiser are based on static operation.

REMARKS:

-
-
-
-
-